

THF, SD, SF, SDF, SFD, SKF Solenoid Operated Speed Check Valves




How to order

SF	06	-	01-2B2
Series	Valve size	Remark	Suitable solenoid valve
THF SDF	06	N: Valve body only	01-2B2
SD SFD	10	-: with solenoid valve	01-3C4
SF SKF			

Specification

Symbol

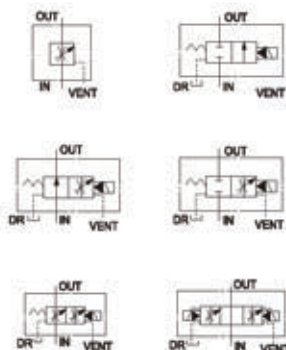

Model	Suitable solenoid valve	Max.operated pressure (kg/cm ²)	Rated flow (L/min)	Weight (kg)	
				- With valve	N Without valve
THF-06	-	250	120	-	5.7
THF-10	-		240	-	8.7
SD-06	01-2B2		120	7	5.5
SD-10	01-2B2		240	10	8.5
SF-06	01-2B2		120	7.2	5.7
SF-10	01-2B2		240	10.2	8.7
SDF-06	01-2B2		120	7.2	5.7
SDF-10	01-2B2		240	10.2	8.7
SFD-06	01-2B2		120	7.7	6.2
SFD-10	01-2B2		240	10.7	9.2
SKF-06	01-3C4		120	8.35	6.5