

SCV2 Cartridge Solenoid Check Valves


Specification



| SCV2-20A70C-20-OM | | | | | | |
|--------------------|----|-------------------------|-----------------------|-----------------------------------|-----------------------------|-----------------------------|
| Normally closed-NC | | Max. flow | Rated flow | Max. pressure kgf/cm ² | Operating temperature range | Weight (kg) |
| NC | NO | 20 L/min (5.3 G.P.M) | 15 L/min (4 G.P.M) | 250 | -20°C ~ 120°C | 0.34(0.7) including coil |
| 20 | | | | | | |

• OM: With manual


Specification

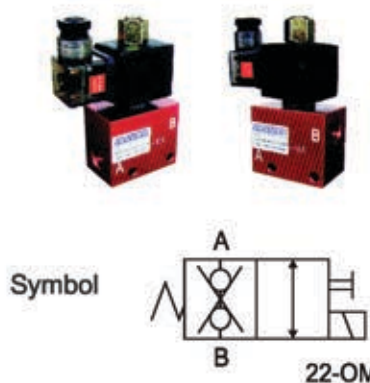

| SCV2-20A70T-OA-22-OM-※ | | | | | | |
|------------------------|----|-------------------------|-----------------------|-----------------------------------|-----------------------------|-----------------------------|
| Normally closed-NC | | Max. flow | Rated flow | Max. pressure kgf/cm ² | Operating temperature range | Weight (kg) |
| NC | NO | 20 L/min (5.3 G.P.M) | 15 L/min (4 G.P.M) | 250 | -20°C ~ 120°C | 0.64(1.4) including coil |
| 20 | | | | | | |

• OM: With manual

Specification

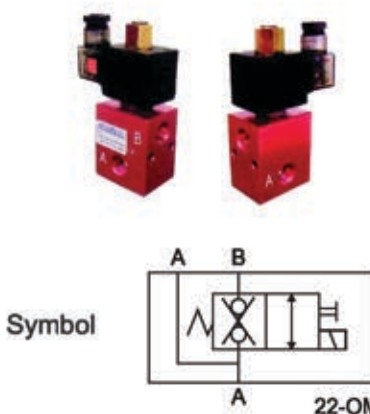


| SCV2-20A70T-OB-22-OM-※ | | | | | | |
|------------------------|----|-------------------------|-----------------------|-----------------------------------|-----------------------------|-----------------------------|
| Normally closed-NC | | Max. flow | Rated flow | Max. pressure kgf/cm ² | Operating temperature range | Weight (kg) |
| NC | NO | 20 L/min (5.3 G.P.M) | 15 L/min (4 G.P.M) | 250 | -20°C ~ 120°C | 0.64(1.4) including coil |
| 20 | | | | | | |

• OM: With manual

SCV 叠加式零泄漏电动止回阀 Modular Cartridge Solenoid Check Valves

Specification

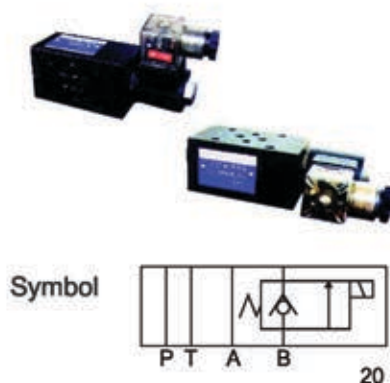

| SCV-20A71M-20-※ | | | | | | |
|--------------------|----|-------------------------|-----------------------|-----------------------------------|-----------------------------|-----------------------------|
| Normally closed-NC | | Max. flow | Rated flow | Max. pressure kgf/cm ² | Operating temperature range | Weight (kg) |
| NC | NO | 20 L/min (5.3 G.P.M) | 15 L/min (4 G.P.M) | 250 | -20°C ~ 120°C | 1.08(2.4) including coil |
| 20 | | | | | | |